


NOTE ON TRUNNION ROLL DIAMETER AND DISTANCE APART:  
 THE ORIGINAL DRAWING K7506-10-A SHOWS ITS TIRE DIA. AT 11'-3" AND THE T.R. CENTERLINE AS 6'-8 1/2" AND THE VERTICAL DISTANCE FROM THE CENTER OF THE DRYER TO THE CENTER OF THE T.R. ROLLS AS 5'-5 3/16". THIS CALCULATES A T.R. DIAMETER OF: 17 7/32".  
 WITH A 11'-5" DIAMETER TIRE AND A 17 7/32" T.F., THE NEW CENTER TO CENTER DISTANCE OF THE T.R.'S IS 7'-0 1/4". IF 26" DIA. T.R.'S ARE INSTALLED THIS DISTANCED INCREASES TO 8'-2". IN ALL CASES THE VERTICAL & CENTERLINE DISTANCES ARE UNCHANGED: 5'-5 3/16".

REPRESENTS USING A 26" DIA. TRUNNION.

BOXED DIMENSIONS CORRESPOND TO ORIGINAL DESIGN.

(\*\*) CONTACT FACE AVAILABLE FOR THRUST ROLLS - 4 1/2"

FEED AND DISCHARGE END TRUNNION ROLL DETAILS  
 ( SECTIONS A-A & B-B )

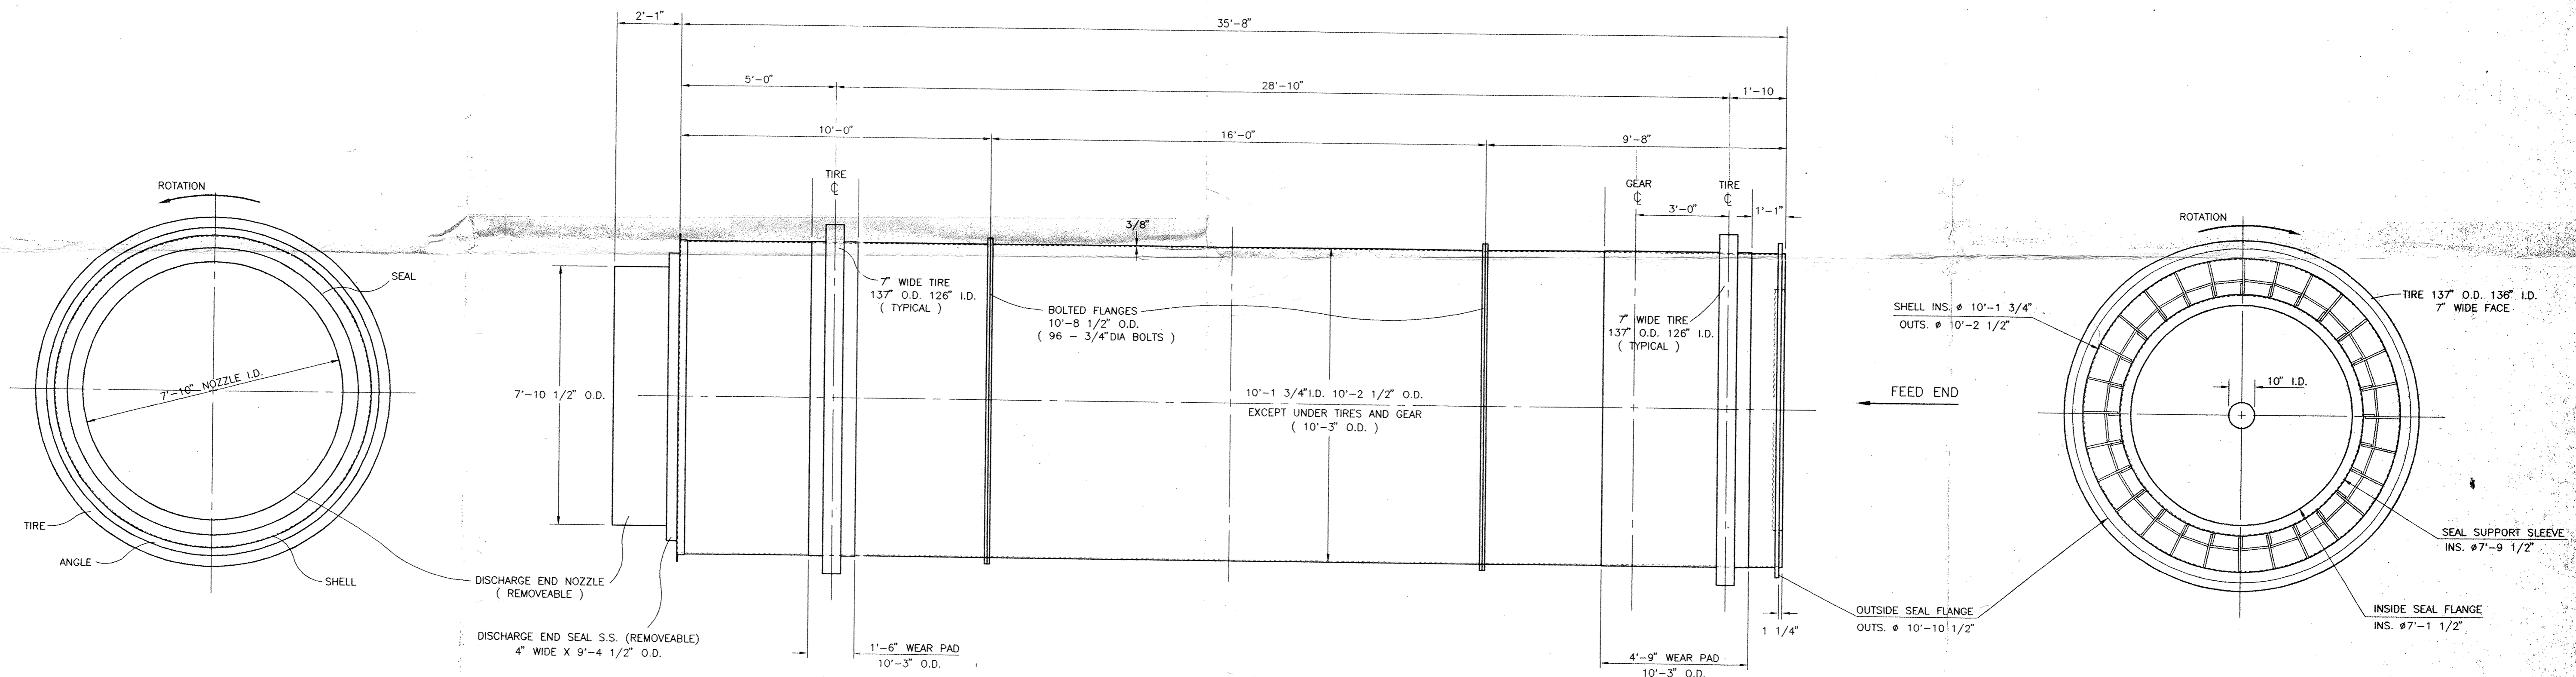

LEFT END VIEW  
 ( DISCHARGE END )

SIDE VIEW

RIGHT END VIEW  
 ( FEED END )

WEIGHT OF SHELL ( THEORETICAL & NO GEARS ) 58,900 LBS.  
 LIFTS: FEED END 23,500 LBS. INCLUDING RESERVE  
 CENTER 21,500 LBS. INCLUDING RESERVE  
 DISCHARGE END 18,500 LBS. INCLUDING RESERVE

- SEE ALSO HAGGERTY DRAWINGS:  
 9601-0 SHELL INTERNALS  
 9602-0 FEED END SEAL DETAILS  
 9603-0 DISCHARGE END SEAL DETAILS  
 9604-0 SHELL DETAILS

REPLACEMENT ROTARY DRUM FOR 10' X 36' ROTOLOUVRE DRYER - KCAC INC. KING CITY, CAL.  
 SCALE 1:24 (1/2"=1')  
 DATE: NOVEMBER 1995  
 HAGGERTY EQUIPMENT CO. LTD. 435 Confor Ave. Northminster B.C. Canada V3L 5H5 Phone (604) 524-6498 Fax (604) 469-1882  
 GENERAL ARRANGEMENT  
 DRAWING NUMBER 9600-0

